

Figure 1

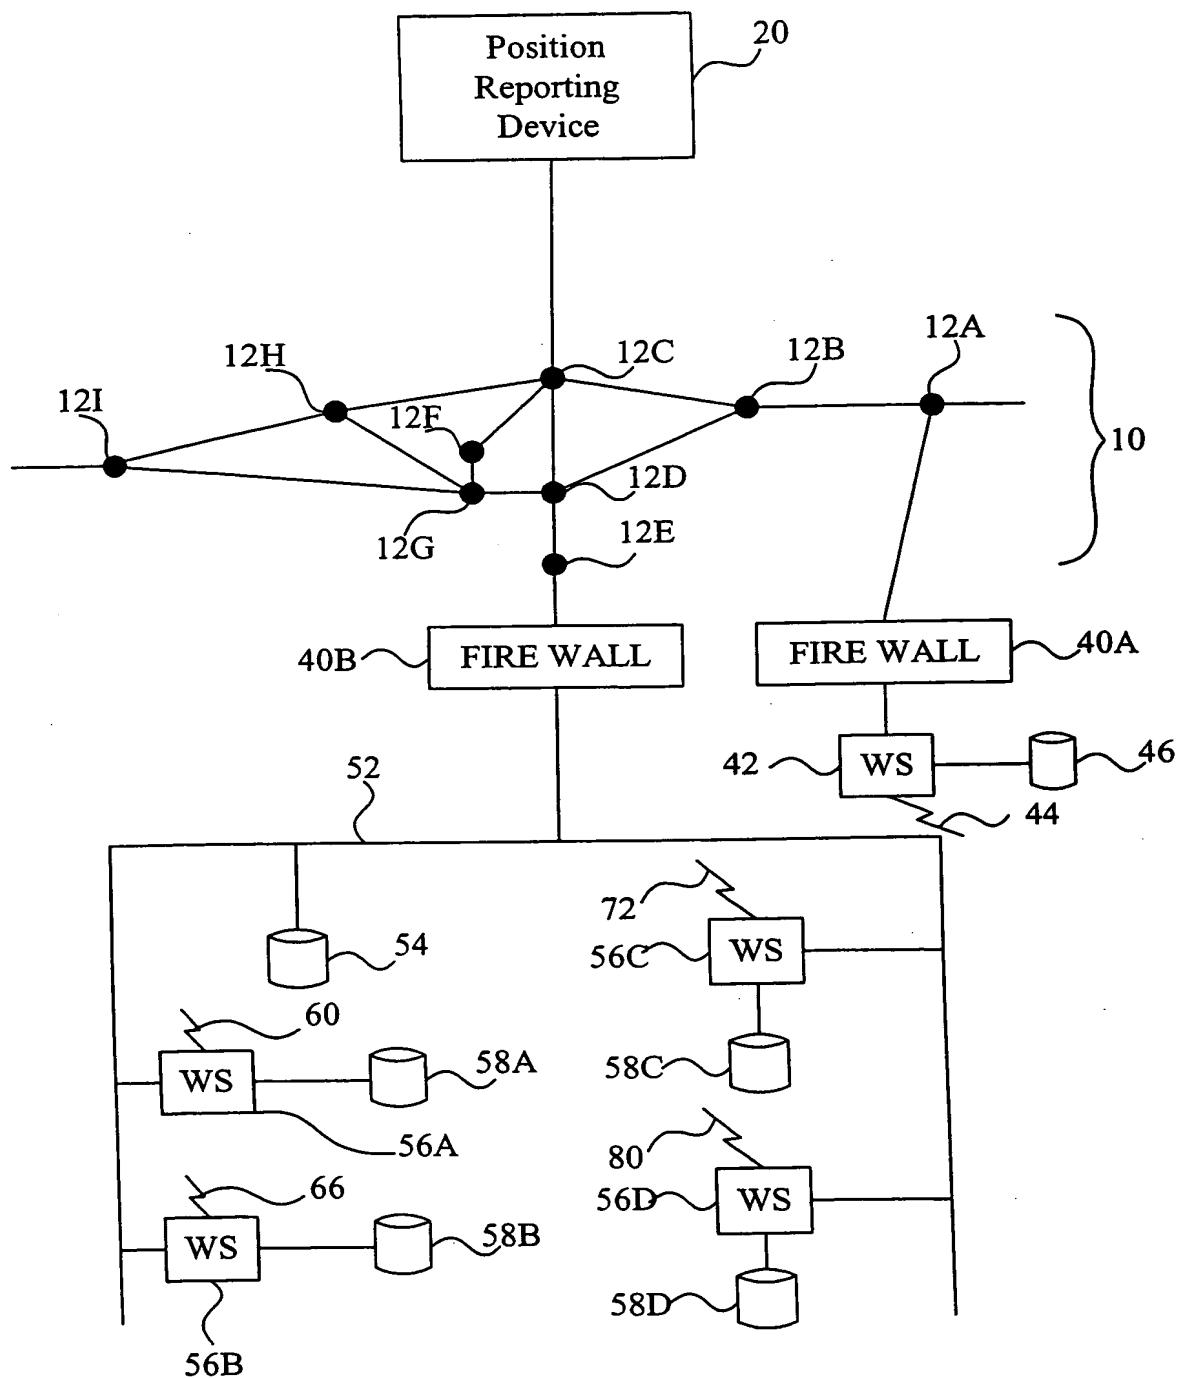


Figure 2

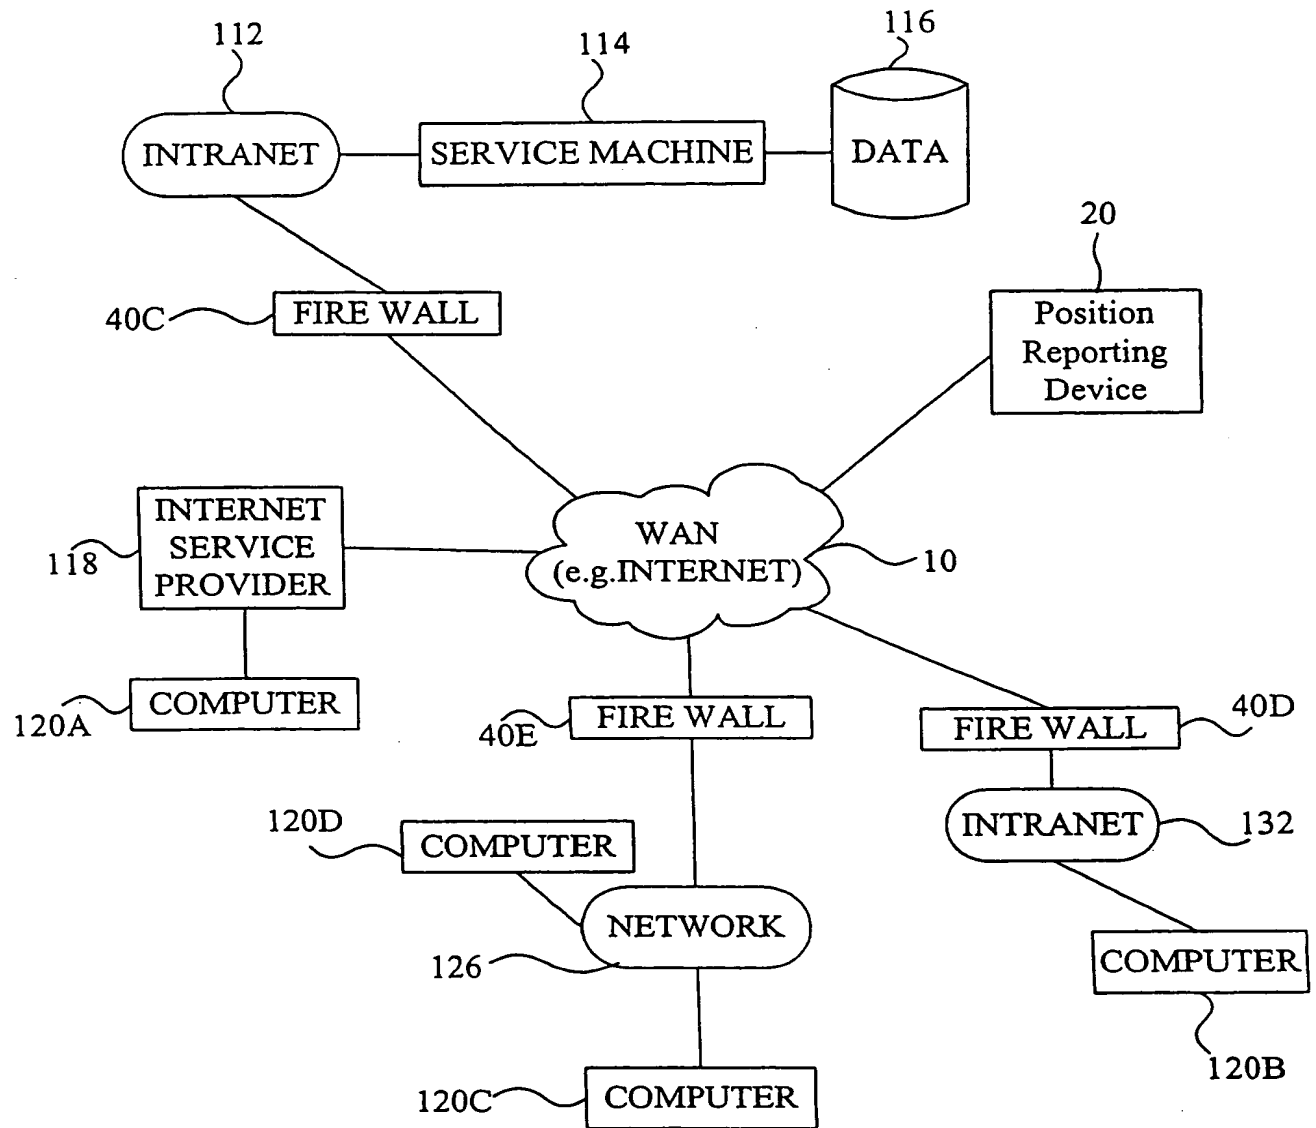


Figure 3

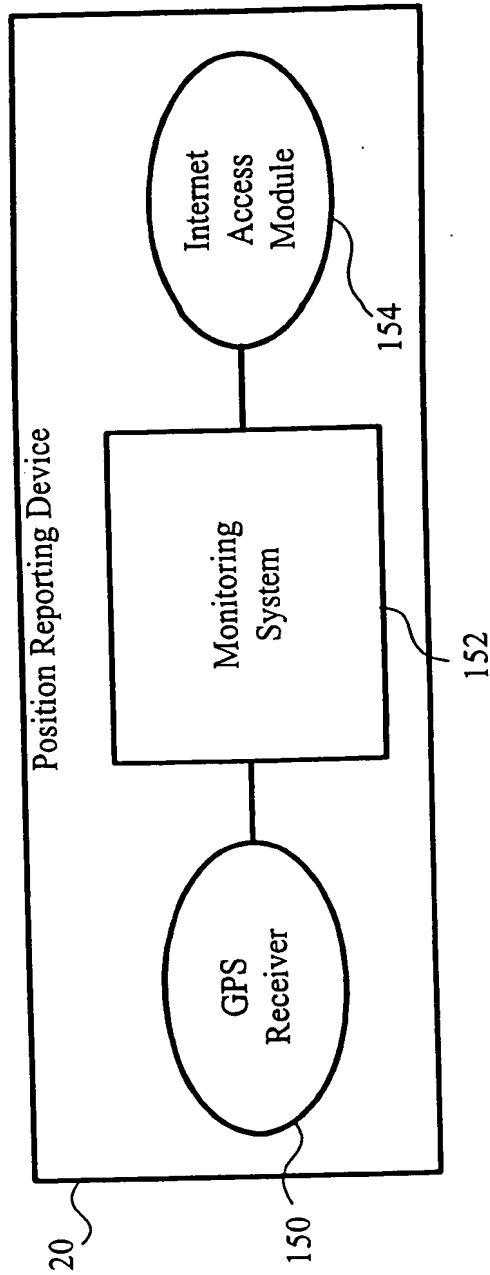


Figure 4


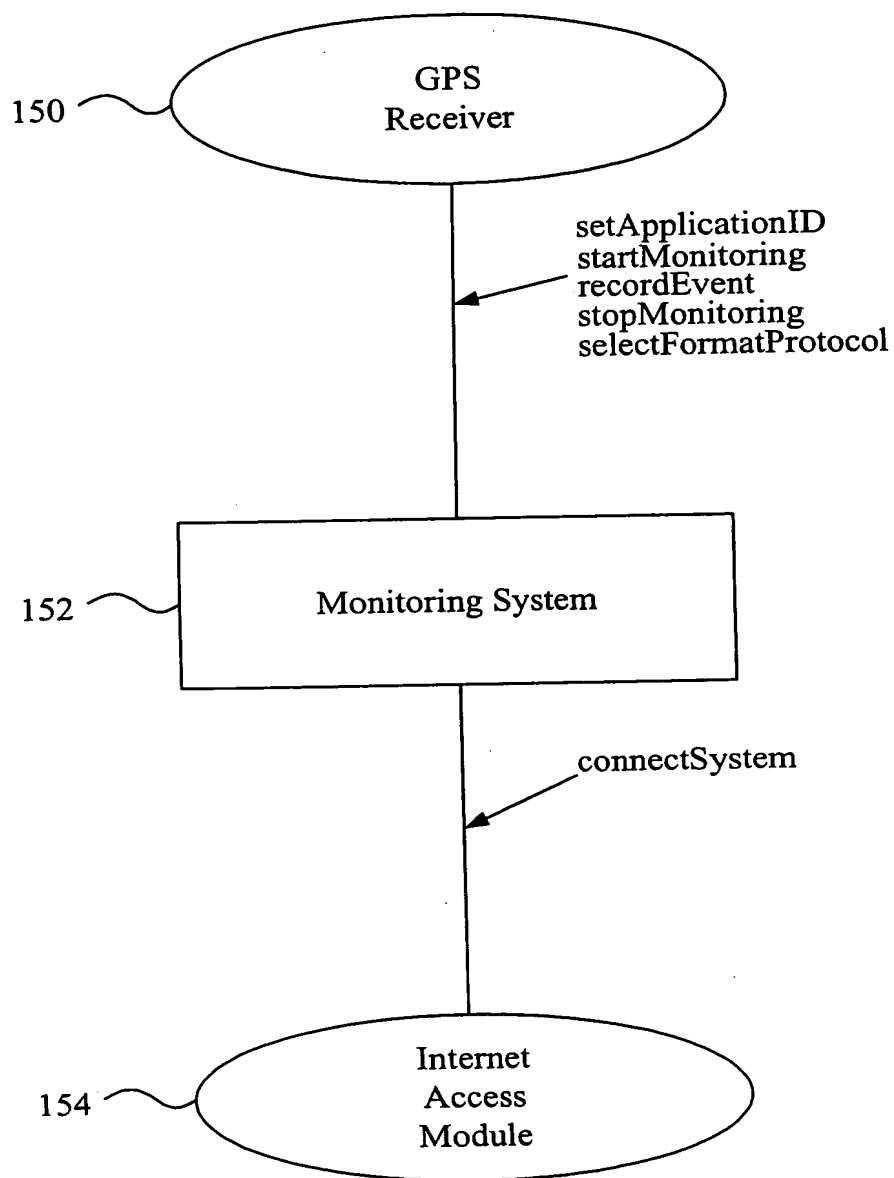


Figure 5

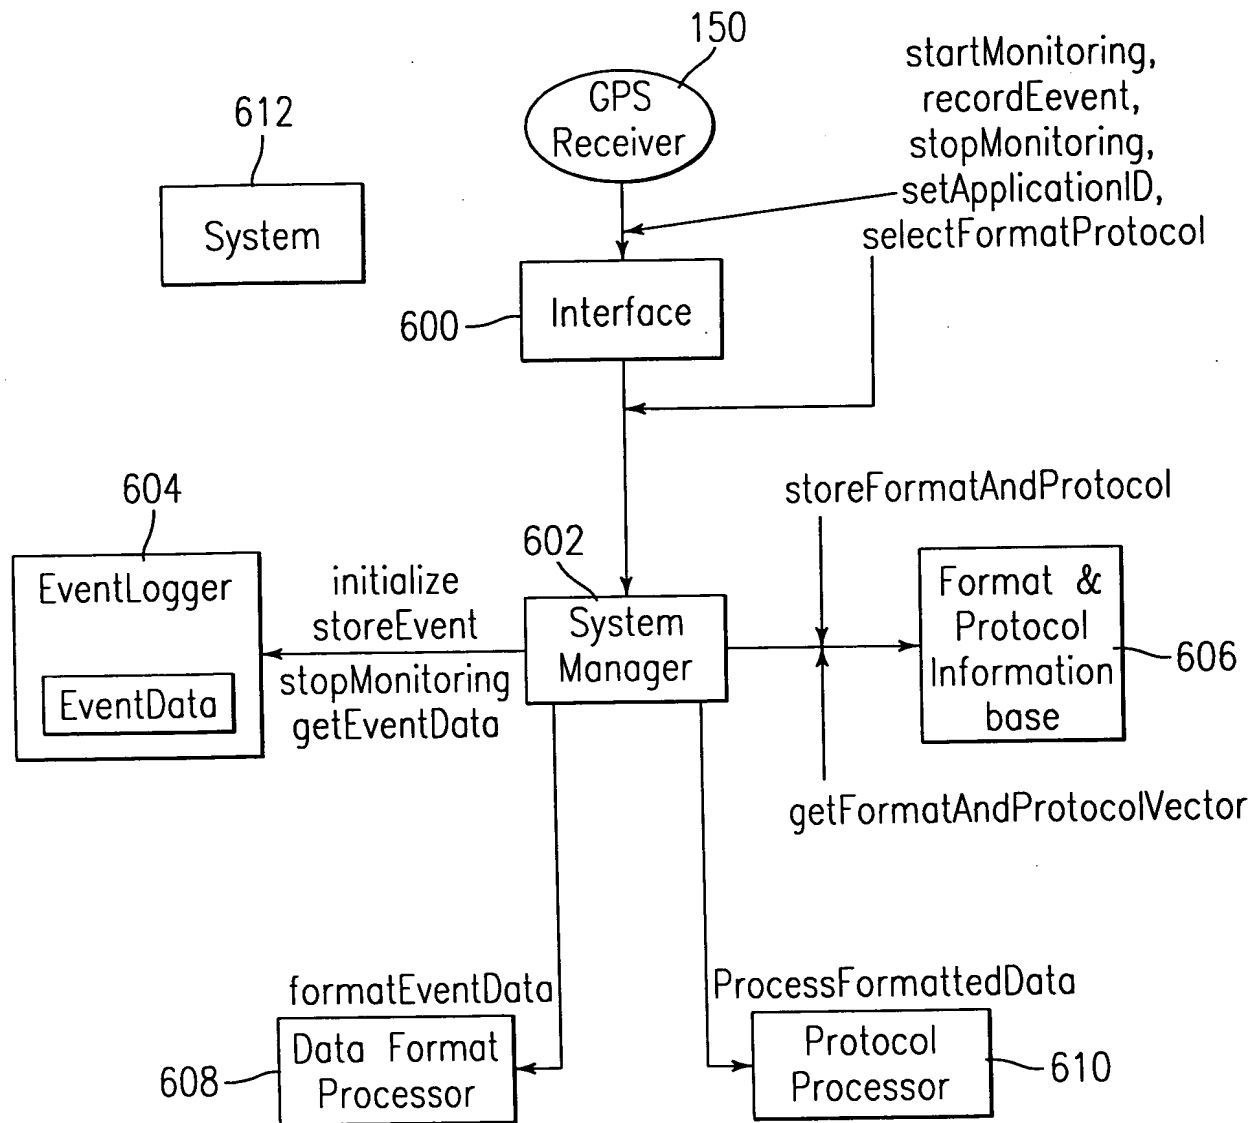

**FIG. 6A**


Return Value	Function Name	Description
bool	getNextSession	Return false when there is no more session; true otherwise
string	getFileNames	Returns file names for the EventData
map<string,string>	getSessionInformation	Returns the map. Keys are UserID, ApplicationID, CumulativeSessionNumber, StartTime, and Duration.
map<string, vector<string>>	getSessionEventData	Returns the map. Keys are EventName and EventTiming. The values of EventTiming vector are in the unit of 10th of a second converted from unsigned integer to string.

**FIG. 6B**

Return Value	Function Name	Description
bool	getNextLine	Returns one line of string data as an out parameter string. The function returns true if there is a line; false if no more line exists with empty string.
string	getFileNameWithSuffix	returns file name for the data with suffix if applicable


*FIG. 6C*



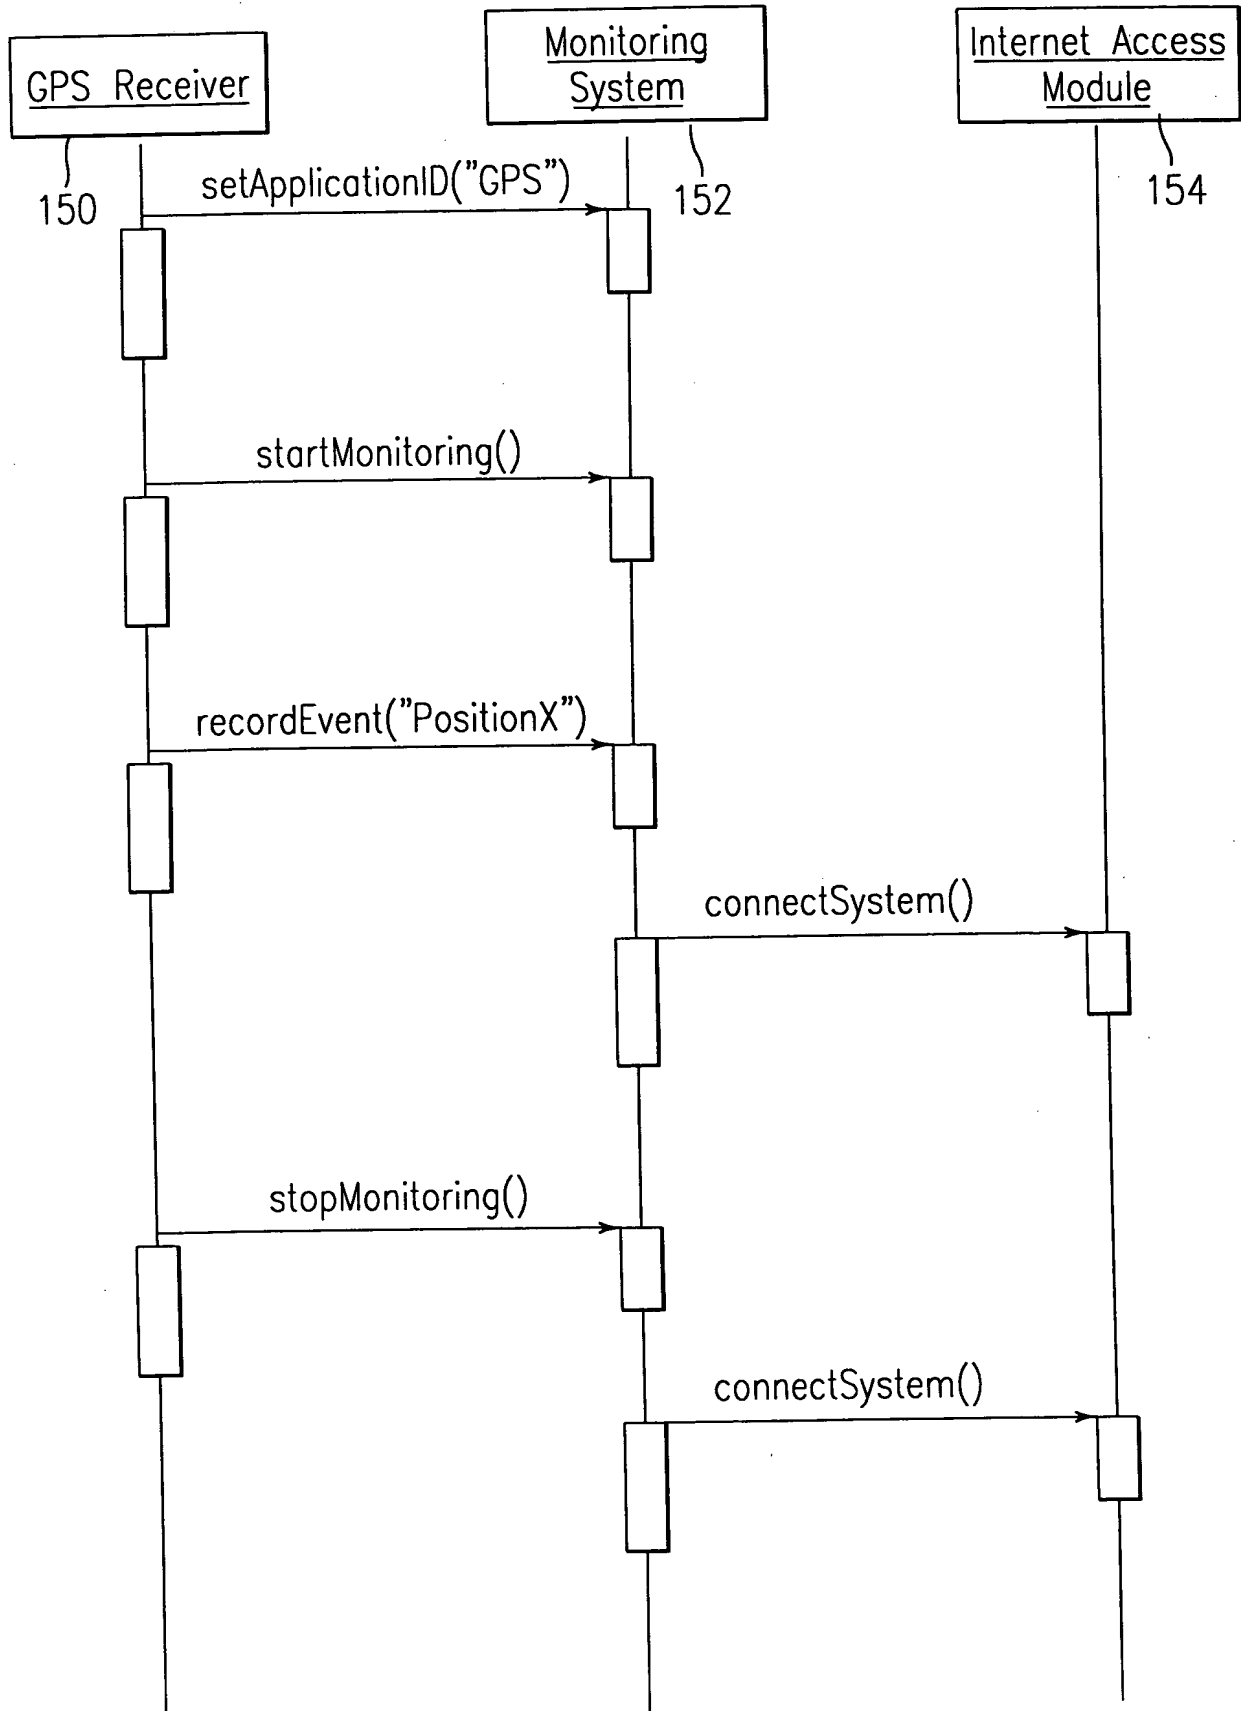


*FIG. 7*

FIG. 8

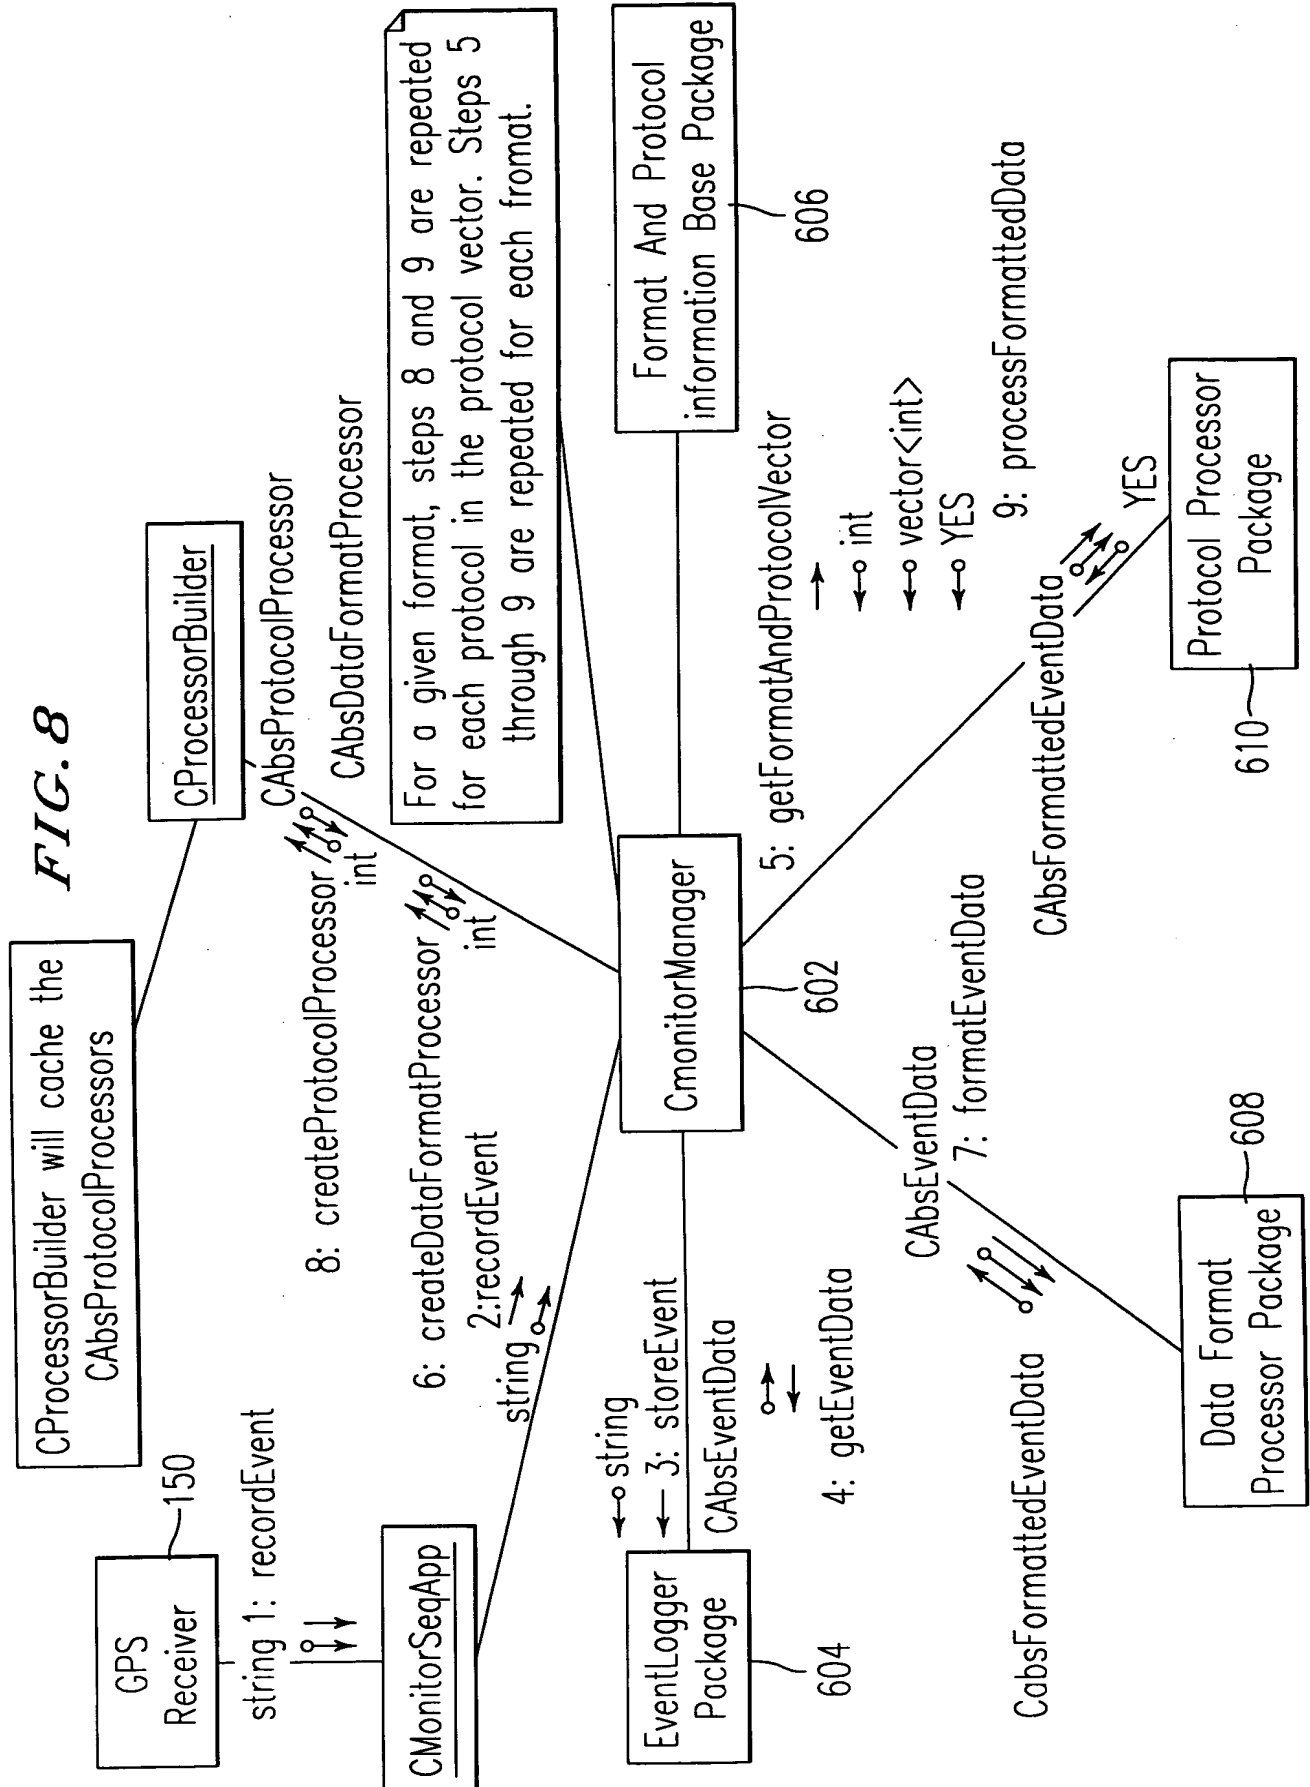

*FIG. 9*

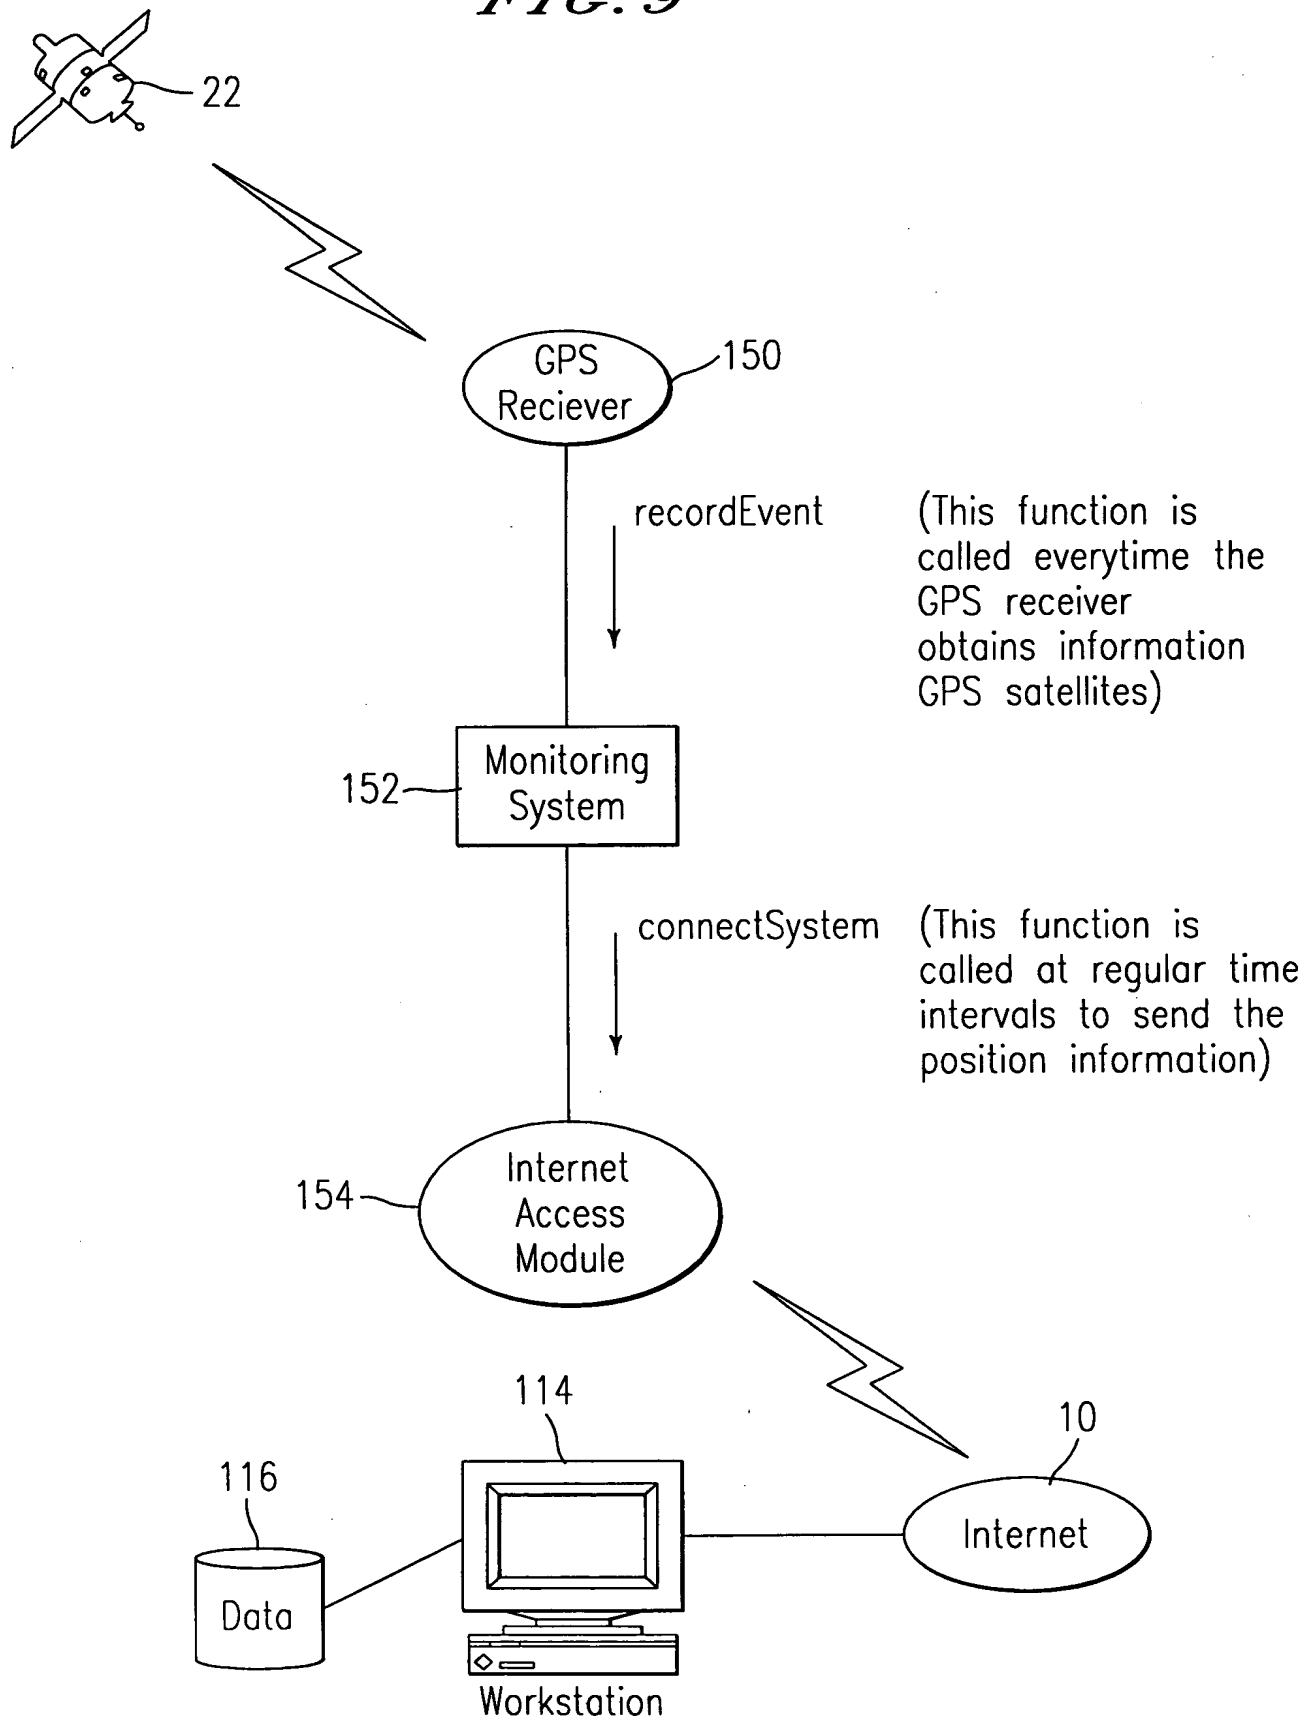

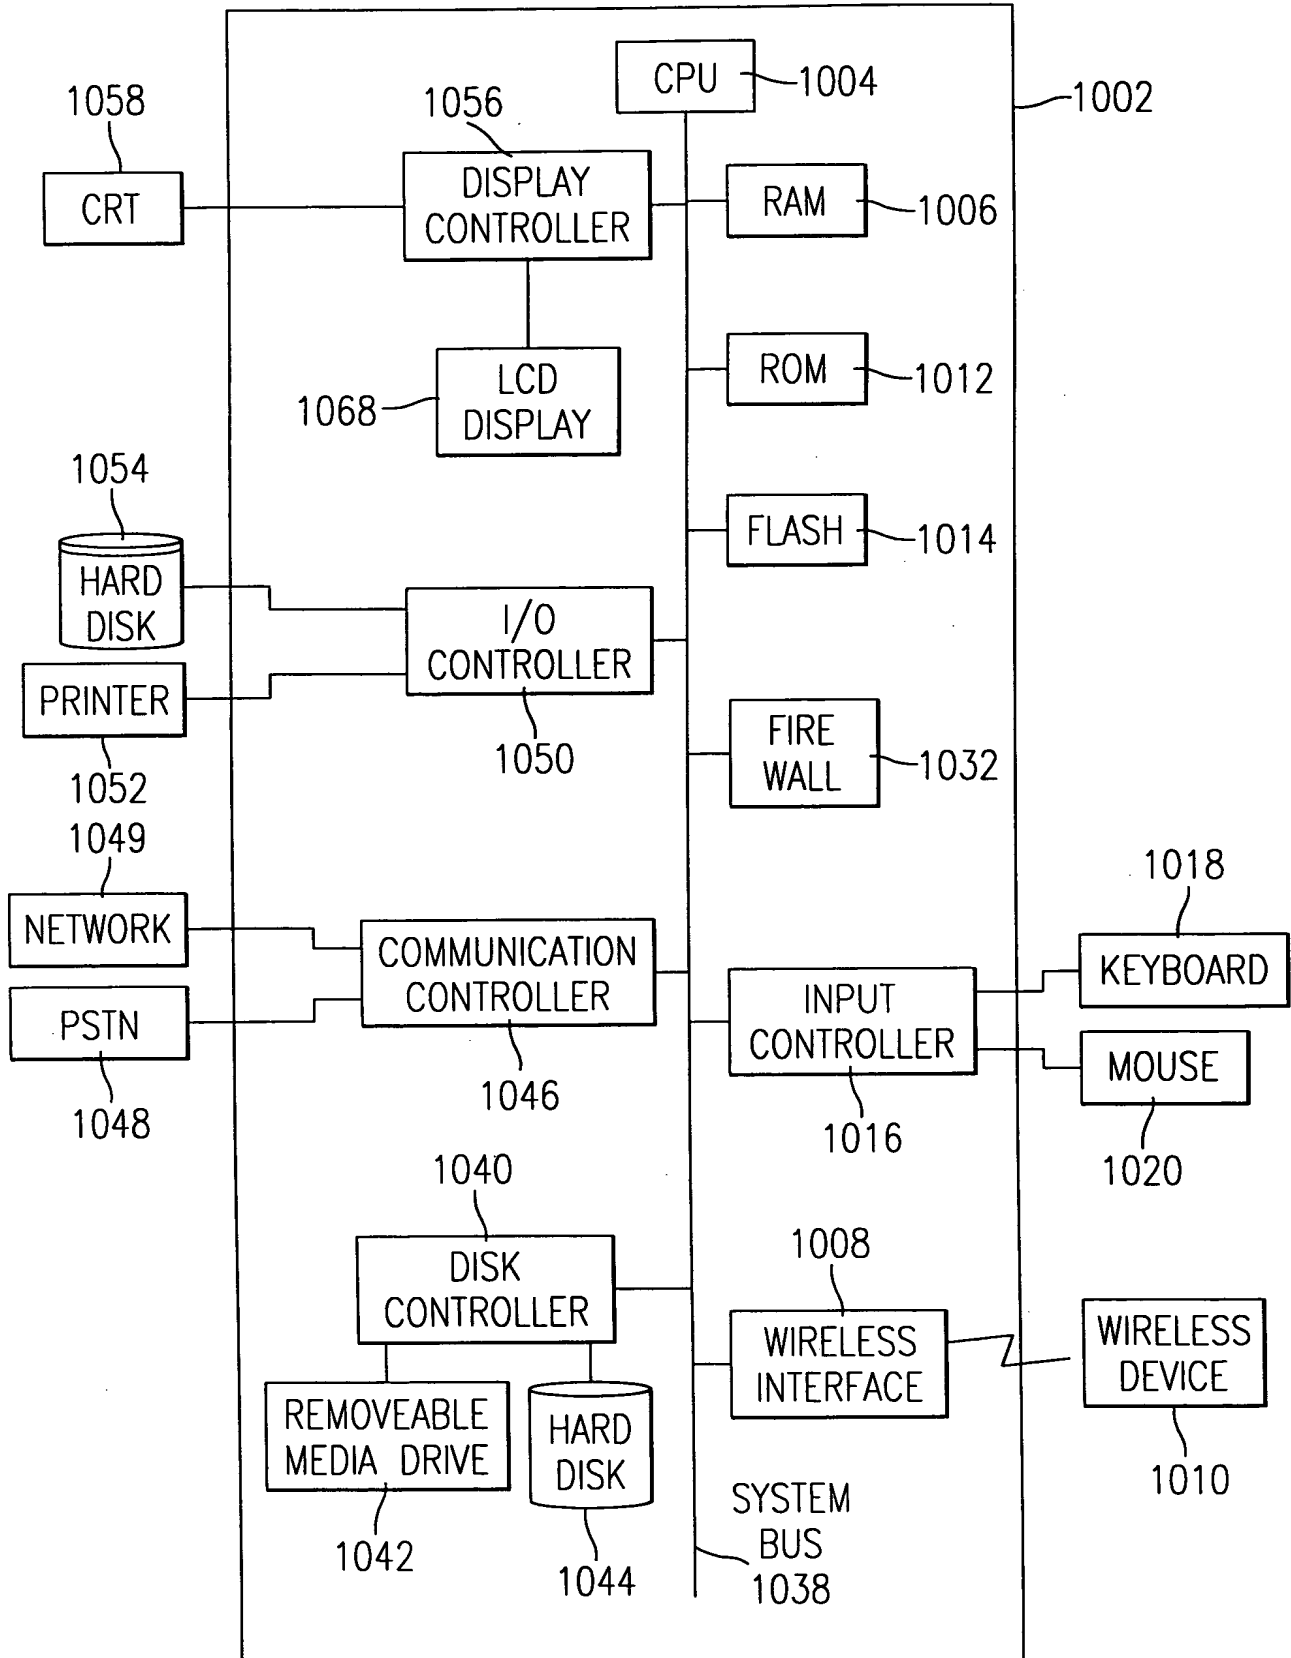


FIG. 10